


23187 KRD6-2/25/100

Residual-current circuit breaker, 2P

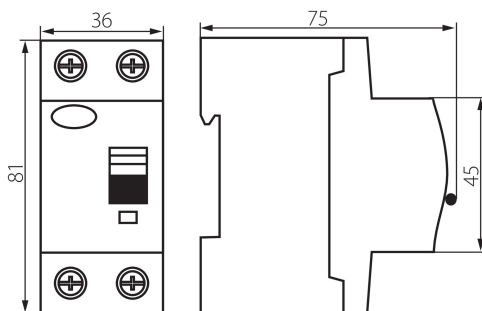

Residual current circuit breaker: is used for additional protection against electric shock, designed for work in sinusoidal alternating current circuits (AC type) and sinusoidal alternating and pulsating current with DC component (A type).

GENERAL DATA:

Colour: white

Place of assembly: na szynę TH35

Norm: PN-EN 61008-1

Length [mm]: 75

Width [mm]: 35

Height [mm]: 81

TECHNICAL DATA:

Rated voltage [V]: 230 AC

Rated current [A]: 25

Rated frequency [Hz]: 50

Ambient temperature range to which the product can be exposed: -25÷40

Range of sections of wires used [mm²]: do 35

Residual-current protection type: AC

Number of modules: 2

Differential-rated current [mA]: 100

IP class: 20

Rated insulation voltage UI [V]: 400

Number of poles: 2