


23188 KRD6-2/25/30-A

Residual-current circuit breaker, 2P

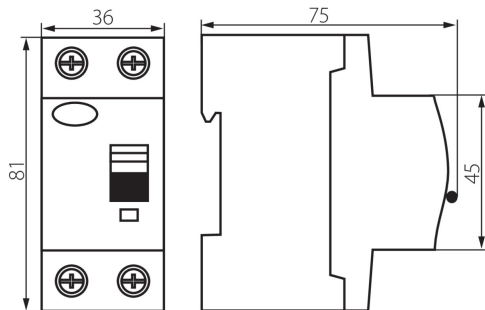

Residual current circuit breaker: is used for additional protection against electric shock, designed for work in sinusoidal alternating current circuits (AC type) and sinusoidal alternating and pulsating current with DC component (A type).

GENERAL DATA:

Colour: white

Place of assembly: rail TH35

TECHNICAL DATA:

Rated voltage [V]: 230 AC

Rated current [A]: 25

Rated frequency [Hz]: 50/60

Ambient temperature range to which the product can be exposed: -25÷40

Residual-current protection type: A

Number of modules: 2

Differential-rated current [mA]: 30

IP class: 20