


23235 KMI-3/100A

Modular switch disconnecter

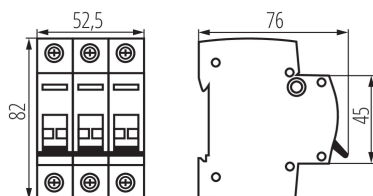

Switch disconnecter is used to disconnect circuits loaded with rated current.

GENERAL DATA:

Utilisation category: AC-22A

Colour: white

Place of application: Indoors

Norm: PN-EN 60947-3

Length [mm]: 76

Width [mm]: 52.5

Height [mm]: 82

TECHNICAL DATA:

Rated voltage [V]: 230/400 AC

Rated current [A]: 100

Rated frequency [Hz]: 50

Ambient temperature range to which the product can be exposed: -25÷45

Range of sections of wires used [mm²]: 1÷50

Number of modules: 3

IP class: 20