


23614 KDB-S24T

KDB-series distribution board

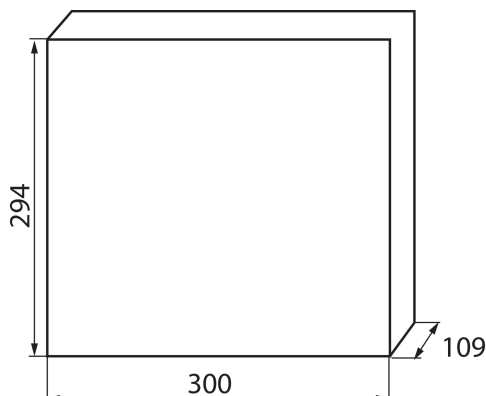

KDB series switchboards meeting the requirement for heat resistance at the temperature of 650°C, can be used on non-flammable surfaces only (e.g. full solid walls made of non-combustible materials). They cannot be used on flammable surfaces (e.g. plasterboard, wood boards, etc.), on the so-called "hollow walls" or on technical sections

GENERAL DATA:

Colour: white / blue

Door colour: blue

Place of assembly: wall mounted

Norm: PN-EN 62208

Length [mm]: 300

Width [mm]: 109

Height [mm]: 294

TECHNICAL DATA:

Rated voltage [V]: 230/400 AC

Rated current [A]: 63

Rated frequency [Hz]: 50

Class of protection against electric shock: II

Material: plastic

Number of modules: 2x12P

Temperature resistance [°C]: 650

IK class: 07

IP class: 30

number of rows: 2

Ilość zacisków N/PE: (6+6+4)x2

23614 KDB-S24T

KDB-series distribution board