


## 23148 KMB6-C25/3

Overcurrent circuit breaker, 3P

5905339231482

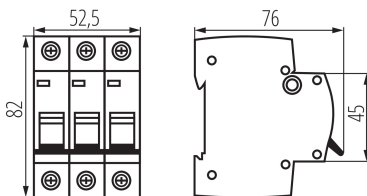

Circuit breaker with overcurrent protection is used to protect cables against overloads and short circuits in installations and devices.

### GENERAL DATA:

**Colour:** white

**Place of assembly:** na szynę TH35

**Norm:** PN-EN 60898-1

**Length [mm]:** 76

**Width [mm]:** 52.5

**Height [mm]:** 82

### TECHNICAL DATA:

**Rated voltage [V]:** 230/400 AC

**Rated current [A]:** 25

**Rated frequency [Hz]:** 50

**Ambient temperature range to which the product can be exposed:** 5÷40

**Range of sections of wires used [mm<sup>2</sup>]:** 1÷25

**Release characteristics:** C

**Energy-limit class:** 3

**Number of modules:** 3

**Rated short-circuit current [A]:** 6000

**IP class:** 20

**Rated insulation voltage UI [V]:** 500

**Number of poles:** 3

### LOGISTIC DATA:

**Unit of measurement:** unit

**Packaging method:** 4

**Number of units in the secondary packaging:** 4

**Number of units in the packaging:** 40

**Net unit weight [g]:** 300

**Grammage [g]:** 330

**Gross unit weight [g]:** 286

**Length of a unit pack [cm]:** 5.5

**Width of a unit pack [cm]:** 7.5

**Height of a unit pack [cm]:** 8.5

**Weight of a cardboard box [kg]:** 13.2

**Width of a cardboard box [cm]:** 25

**Height of a cardboard box [cm]:** 19.5

**Length of a cardboard box [cm]:** 45

## 23148 KMB6-C25/3

---

Overcurrent circuit breaker, 3P

| Volume of a cardboard box [m<sup>3</sup>] : 0.021938