

23614 KDB-S24T

KDB-series distribution board

5905339236142



KDB series switchboards meeting the requirement for heat resistance at the temperature of 650°C, can be used on non-flammable surfaces only (e.g. full solid walls made of non-combustible materials). They cannot be used on flammable surfaces (e.g. plasterboard, wood boards, etc.), on the so-called "hollow walls" or on technical sections

GENERAL DATA:

Colour: white / blue
Door colour: blue
Place of assembly: wall mounted
Norm: PN-EN 62208
Length [mm]: 300
Width [mm]: 109
Height [mm]: 294

TECHNICAL DATA:


Rated voltage [V]: 230/400 AC
Rated current [A]: 63
Rated frequency [Hz]: 50
Class of protection against electric shock: II
Material: plastic
Number of modules: 2x12P
Temperature resistance [°C]: 650
IK class: 07
IP class: 30
number of rows: 2
Ilość zacisków N/PE: (6+6+4)x2

LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 5
Number of units in the secondary packaging: 1
Number of units in the packaging: 5
Net unit weight [g]: 1340
Grammage [g]: 1792
Gross unit weight [g]: 1460
Length of a unit pack [cm]: 31
Width of a unit pack [cm]: 11.5
Height of a unit pack [cm]: 31

23614 KDB-S24T

KDB-series distribution board

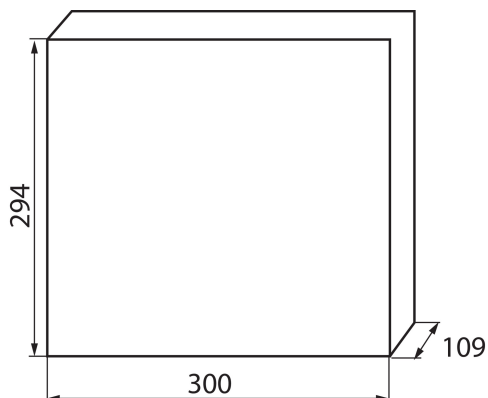

Weight of a cardboard box [kg] : 8.96

Width of a cardboard box [cm] : 35

Height of a cardboard box [cm] : 34

Length of a cardboard box [cm] : 59.5

Volume of a cardboard box [m³] : 0.070805