


23618 KDB-F12T

KDB-series distribution board

5905339236180

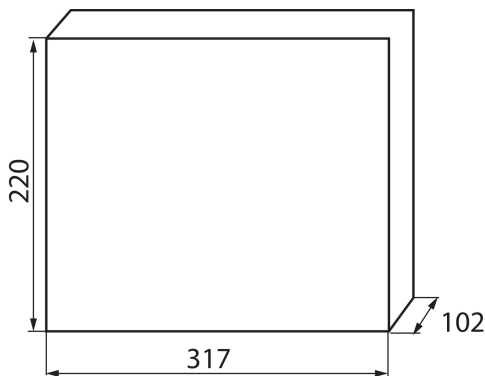

KDB series switchboards meeting the requirement for heat resistance at the temperature of 650°C, can be used on non-flammable surfaces only (e.g. full solid walls made of non-combustible materials). They cannot be used on flammable surfaces (e.g. plasterboard, wood boards, etc.), on the so-called "hollow walls" or on technical sections

GENERAL DATA:

Colour: white / blue
Door colour: blue
Place of assembly: Recessed mount in the wall
Norm: PN-EN 62208
Length [mm]: 317
Width [mm]: 102
Height [mm]: 220

TECHNICAL DATA:

Rated voltage [V]: 230/400 AC
Rated current [A]: 63
Rated frequency [Hz]: 50
Class of protection against electric shock : II
Material: plastic
Number of modules: 12P
Temperature resistance [°C]: 650
IK class: 07
IP class: 30
number of rows: 1
Ilość zacisków N/PE: 6+6+4

LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 10
Number of units in the secondary packaging : 1
Number of units in the packaging: 10
Net unit weight [g]: 816
Grammage [g]: 1146
Gross unit weight [g]: 962
Length of a unit pack [cm]: 22.5
Width of a unit pack [cm]: 10.5
Height of a unit pack [cm]: 32
Weight of a cardboard box [kg]: 11.46

23618 KDB-F12T

KDB-series distribution board

Width of a cardboard box [cm]: 46

Height of a cardboard box [cm]: 34.5

Length of a cardboard box [cm] : 54

Volume of a cardboard box [m³]: 0.085698