


24112 KCPM-AX11

KCP power contactor

5905339241122

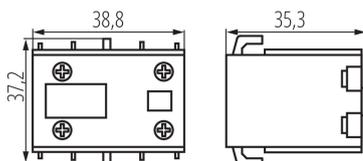

Auxiliary contact block for miniature power contactors has two contacts - 1NO and 1NC, installation on the front of the contactor.

GENERAL DATA:

Utilisation category: AC-15

Colour: white

Place of assembly: rail TH35

Norm: PN-EN 60947-4-1

TECHNICAL DATA:

Connection type: Terminal block

Number of n.o./n.c. contacts: 1/1

Rated breaking voltage U_e [V]: 400

Conventional thermal current I_{th} [A]: 10

IP class: 20

Auxiliary contacts: 2

Rated insulation voltage U_i [V]: 690

Rated impulse withstand voltage U_{imp} [V]: 6000

Rated operational current I_e [A]: 0.95

LOGISTIC DATA:

Packaging method: 500

Number of units in the secondary packaging: 1

Number of units in the packaging: 500

Net unit weight [g]: 34

Grammage [g]: 39.06

Length of a unit pack [cm]: 4

Width of a unit pack [cm]: 4

Height of a unit pack [cm]: 4.5

Weight of a cardboard box [kg]: 19.53

Width of a cardboard box [cm]: 31

Height of a cardboard box [cm]: 30

Length of a cardboard box [cm]: 44

Volume of a cardboard box [m³]: 0.04092