


24113 KCPM-AX22

KCP power contactor

5905339241139

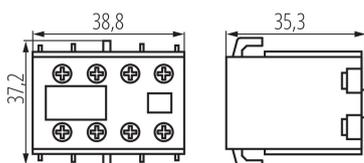

Auxiliary contact block for miniature power contactors has four contacts - 2NO and 2NC, installation on the front of the contactor.

GENERAL DATA:

Utilisation category: AC-15

Colour: white

Place of assembly: rail TH35

Norm: PN-EN 60947-4-1

TECHNICAL DATA:

Connection type: Terminal block

Number of n.o./n.c. contacts: 2/2

Rated breaking voltage U_e [V]: 400

Conventional thermal current I_{th} [A]: 10

IP class: 20

Auxiliary contacts: 4

Rated insulation voltage U_i [V]: 690

Rated impulse withstand voltage U_{imp} [V]: 6000

Rated operational current I_e [A]: 0.95

LOGISTIC DATA:

Packaging method: 500

Number of units in the secondary packaging: 1

Number of units in the packaging: 500

Net unit weight [g]: 42

Grammage [g]: 46.82

Length of a unit pack [cm]: 4

Width of a unit pack [cm]: 4

Height of a unit pack [cm]: 4.5

Weight of a cardboard box [kg]: 23.41

Width of a cardboard box [cm]: 28

Height of a cardboard box [cm]: 21

Length of a cardboard box [cm]: 40

Volume of a cardboard box [m³]: 0.02352