


03845 DB212F 2X12P/FMD

DB-series distribution board

5905339038456

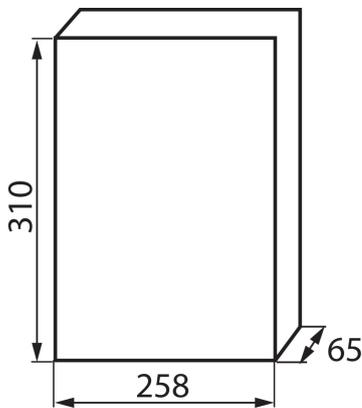

DB series switchboards, meeting the requirement for heat resistance at the temperature of 650°C, can be used on non-flammable surfaces only (e.g. full solid walls made of non-combustible materials). They cannot be used on flammable surfaces (e.g. plasterboard, wood boards, etc.), on the so-called "hollow walls" or on technical sections.

GENERAL DATA:

Colour: white / grey

Door colour: grey

Place of assembly: Recessed mount in the wall

Norm: PN-EN 62208

TECHNICAL DATA:

Rated voltage [V]: 230/400 AC

Rated current [A]: 63

Rated frequency [Hz]: 50

Class of protection against electric shock: II

Material: plastic

Number of modules: 2x12P

Temperature resistance [°C]: 650

IK class: 06

IP class: 40

number of rows: 2

LOGISTIC DATA:

Packaging method: 10

Number of units in the secondary packaging: 1

Number of units in the packaging: 10

Net unit weight [g]: 1174

Grammage [g]: 1450

Length of a unit pack [cm]: 35.5

Width of a unit pack [cm]: 30.5

Height of a unit pack [cm]: 10.5

Weight of a cardboard box [kg]: 14.5

Width of a cardboard box [cm]: 37.5

Height of a cardboard box [cm]: 62.5

Length of a cardboard box [cm]: 55

Volume of a cardboard box [m³]: 0.128906

03845 DB212F 2X12P/FMD

DB-series distribution board