


## 03846 DB312F 3X12P/FMD

DB-series distribution board

5905339038463

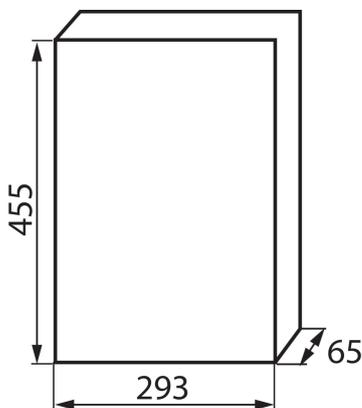

DB series switchboards, meeting the requirement for heat resistance at the temperature of 650°C, can be used on non-flammable surfaces only (e.g. full solid walls made of non-combustible materials). They cannot be used on flammable surfaces (e.g. plasterboard, wood boards, etc.), on the so-called “hollow walls” or on technical sections.

### GENERAL DATA:

**Colour:** white / grey

**Door colour:** grey

**Place of assembly:** Recessed mount in the wall

**Norm:** PN-EN 62208

### TECHNICAL DATA:

**Rated voltage [V]:** 230/400 AC

**Rated current [A]:** 63

**Rated frequency [Hz]:** 50

**Class of protection against electric shock:** II

**Material:** plastic

**Number of modules:** 3x12P

**Temperature resistance [°C]:** 650

**IK class:** 06

**IP class:** 40

**number of rows:** 3

### LOGISTIC DATA:

**Packaging method:** 5

**Number of units in the packaging:** 5

**Net unit weight [g]:** 1835

**Grammage [g]:** 2320

**Length of a unit pack [cm]:** 51

**Width of a unit pack [cm]:** 35.5

**Height of a unit pack [cm]:** 11

**Weight of a cardboard box [kg]:** 11.6

**Width of a cardboard box [cm]:** 36

**Height of a cardboard box [cm]:** 52.5

**Length of a cardboard box [cm]:** 57.5

**Volume of a cardboard box [m³]:** 0.108675

**03846** DB312F 3X12P/FMD

---

DB-series distribution board