


03841 DB106F 1X6P/FMD

DB-series distribution board

5905339038418

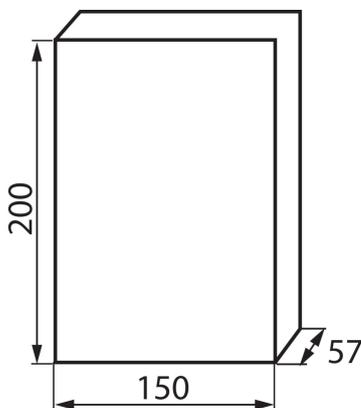

DB series switchboards, meeting the requirement for heat resistance at the temperature of 650°C, can be used on non-flammable surfaces only (e.g. full solid walls made of non-combustible materials). They cannot be used on flammable surfaces (e.g. plasterboard, wood boards, etc.), on the so-called “hollow walls” or on technical sections.

GENERAL DATA:

Colour: white / grey

Door colour: grey

Place of assembly: Recessed mount in the wall

Norm: PN-EN 62208

TECHNICAL DATA:

Rated voltage [V]: 230/400 AC

Rated current [A]: 63

Rated frequency [Hz]: 50

Class of protection against electric shock: II

Material: plastic

Number of modules: 6P

Temperature resistance [°C]: 650

IK class: 06

IP class: 40

number of rows: 1

LOGISTIC DATA:

Packaging method: 20

Number of units in the secondary packaging: 1

Number of units in the packaging: 20

Net unit weight [g]: 384

Grammage [g]: 525

Length of a unit pack [cm]: 23

Width of a unit pack [cm]: 17.5

Height of a unit pack [cm]: 10.5

Weight of a cardboard box [kg]: 10.5

Width of a cardboard box [cm]: 38

Height of a cardboard box [cm]: 47.5

Length of a cardboard box [cm]: 54

Volume of a cardboard box [m³]: 0.09747

03841 DB106F 1X6P/FMD

DB-series distribution board